



Quick Installation Guide

HMX 2050

User Station

The following will help you to install your HMX 2050 user station. Should you require further assistance, please contact Avocent Technical Support.

To install the HMX 2050 user station

Overview

The HMX 2050 user station provides hardware-based digital desktop extension for digital video, keyboard, mouse, USB media and audio signals. The HMX extension system consists of an HMX user station and HMIQDHDD transmitter. These are interconnected in a point-to-point configuration at Gigabit Ethernet rates over a single UTP cable or across an IP network.

1 Connecting power to the HMX user station or HMIQDHDD transmitter

Locate the power supply and AC line cord. Plug the DC connector of the power supply into the matching socket on the rear of the user station or transmitter. Attach the AC line cord to the power supply.

2 Preparing the remote workstation

Set the screen resolution and refresh rates of the workstation according to the table on the reverse page of this installation guide. Turn off the workstation.

3 Connecting the transmitter

Attach the HMIQDHDD transmitter to the video, audio, microphone and USB ports on the workstation.

4 Establishing LAN connections

Establish the connection between the HMIQDHDD transmitter and the HMX user station using straight-through or cross-over UTP cables or industry-standard Ethernet switches.

5 Connecting the peripherals


Attach the monitor, keyboard, mouse and audio cable to the HMX user station. A removable drive or CD-ROM drive can be hot-plugged into the USB ports on the HMX user station at any time.

6 Turning on your user station or transmitter

To turn on your user station or transmitter, plug the correct line cord into an appropriate power source.

Additional information

For further information regarding hardware connection, setup and troubleshooting tips, please refer to the installer/user guide that accompanies your user station. Go to www.avocent.com for the latest user guide or HMX user station updates.

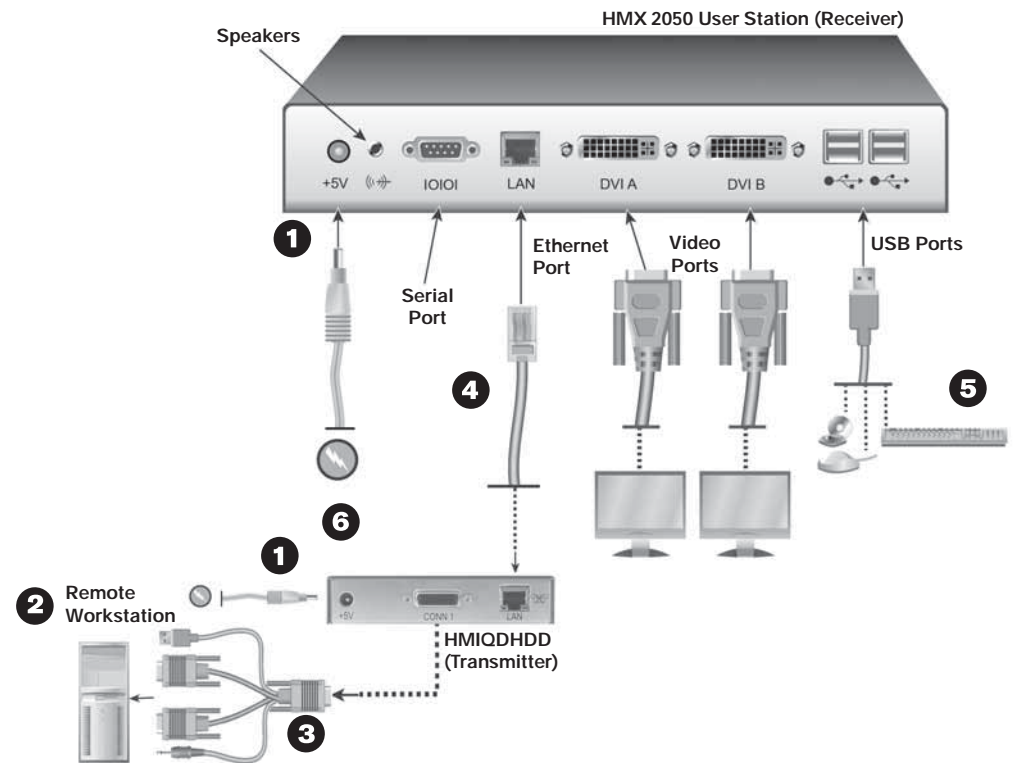



Quick Installation Guide

HMX 2050

User Station

The following will help you to install your HMX 2050 user station. Should you require further assistance, please contact Avocent Technical Support.

Using the serial interface

The HMX 2050 user station incorporates a serial menuing interface that allows you to:

- Alter network settings for the HMX user station and HMIQD HDD transmitter
- Set or change passwords
- Upgrade firmware
- Reset units to factory defaults
- Reboot a unit
- View connection status
- Console Settings

The menu system may be accessed via HyperTerminal and a null modem cable. Configure your session as follows: 57600 bits per second, 8 data bits, no parity, 1 stop bit and no flow control. The password is **password** for both the transmitter and user station.

Supported refresh rates

Set the screen resolution and refresh rate of the remote workstation according to the following table. Unsupported settings will cause blank video at the HMX user station.

Resolution	Refresh Rates
1920x1200	60 Hertz
1600x1200	60 Hertz
1360x768	60 Hertz
1280x1024	60 Hertz
1280x720	50, 60 Hertz
1024x768	60, 70, 75, 85 Hertz
800x600	60, 72, 75, 85 Hertz
640x480	60, 72, 75, 85 Hertz



Agency Notifications

USA Notification

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Canadian Notification

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

Le présent appareil numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la classe A prescrites dans le Règlement sur le brouillage radioélectrique édicté par le Ministère des Communications du Canada.

European Union Declaration of Conformity

This equipment has been tested and found to comply with the limits for a Class A computing device in accordance with the specifications in the European standard EN55022. These limits are designed to provide reasonable protection against harmful interference. This equipment generates uses and can radiate radio-frequency energy, and if not installed and used in accordance with the instructions, might cause harmful interference to radio or television reception. However, there is no guarantee that harmful interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment on and off, you can correct the interference with one or more of the following measures:

- a) Reorient or relocate the receiving antenna.
- b) Increase the separation between the equipment and the receiver.
- c) Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- d) Consult the supplier or an experienced radio/TV technician for help.

Japanese Approvals

この装置は、情報処理装置等電波障害自主規制協議会（VCCI）の基準に基づくクラスA情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

To Contact Avocent Technical Support: Visit www.avocent.com/support