



LCD Console and KVM Switch Integrated Tray

Single, access and control LCD solutions for SMB and server room environments

The 17-inch LCD rack console and SwitchView® 1000 8-port or 16-port KVM switches create a single integrated access solution for SMB and server room environments. These solutions provide optimal support of PS/2 and USB systems. Out-of-band access to critical servers is non-intrusive to the network and reduces downtime.

The LCD rack console and SwitchView switch includes an On-Screen Display (OSD) in multiple languages. The Grade A 17-inch TFT active-matrix monitor supports 1280x1024 resolution @ 60Hz.

The integrated system ships with all required cables.

Features and Benefits

- **1U Slide-in design.** Easy to access and low demand on valuable rack space.
- **Combo cables.** Uses a three-in-one KVM cable that supports USB or PS/2 target devices
- **Security.** A key lock prevents access to the keypad or LCD trays.
- **At-the-rack server access.** Rack-based access reduces downtime when network is unavailable.
- **Grade A, tempered glass LCD. TFT active-matrix.** Crisp, clear images.
- **On-Screen Display (OSD) in multiple languages.** Easy to use interface.



Front view of the LCD console with integrated KVM switch and combo KVM cable that connects to the back of the LCD tray and provides USB or PS/2 cables.

Part Number	Description
Ordering Details	
LCD17SWT8-XXX	1U 17-inch single rail LCD rack console with integrated 8-port KVM switch and 8 cables
LCD17SWT16-XXX	1U 17-inch single rail LCD rack console with integrated 16-port KVM switch and 8 cables
CBL0029-8	Package of 8 - 6 foot 3-in-1 cables
CBL0030-8	Package of 8 - 9 foot 3-in-1 cables

For country-specific availability, please contact an Avocent sales representative.

Specifications

Mechanical

Size: 1.73" (4.4 cm)H, 17.62" (44.75 cm)W, 23.31" (59.21 cm)D

Weight: 28.6 lbs (13 Kg)

Environmental

Operating Temperature: 32 to 122 F (0 to 50 C)

Storage Temperature: -4 to 140 F (-20 to 60 C)

Power

Operating Voltage: AC 100-240V

Supported Hardware

Computers: PS/2 and USB

Performance


Resolution: 1280x1024

Standards

Approved Agency:
cUL, UL, CE, FCC, C-Tick

WARRANTY

Two Year

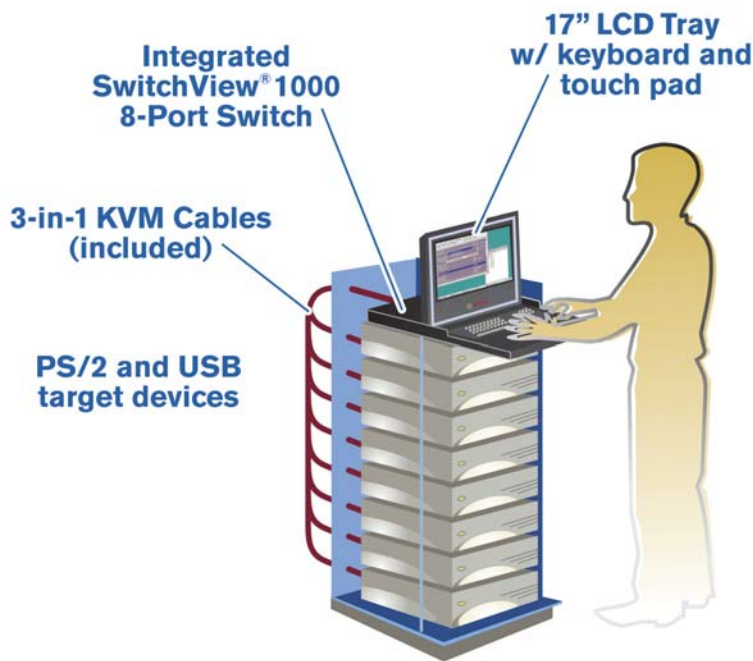

Back view of the integrated LCD rack console.