



Secure remote and local access in a single solution for the SMB environment

The Avocent® AutoView® 3050, AutoView 3100 and AutoView 3200 digital KVM appliances include access for one or two digital users and access for a local user in a single solution. The on-board Web interface provides secure, remote access designed for today's evolving SMB environment. The on-board Web interface lets you access target devices from any location. With this all-in-one solution, you can remotely manage all connected servers and serial-based devices from your desk or across town. The local port gives you convenient at-the-rack access. These solutions also include local PS/2 and USB peripheral support.

The AutoView 3050, AutoView 3100 and AutoView 3200 digital KVM offers LDAP user authentication, SSL-128 bit, DES, 3DES or AES communication, which are superior to industry standards. Other security features include 64 user accounts and an access control list for each user.

Benefits


- **Security.** LDAP authentication and encrypted IP communication between the user's browser and switch can be SSL-128 bit, DES, 3DES or AES.
- **On-board Web Interface.** No need to load and manage another software program on the users PC.
- **Access.** One or two digital paths let you remotely manage all connected servers and serial-based devices. A local port provides at-the-rack access for a local analog user.
- **Multi-platform Support.** Local PS/2 and USB connections and multi-platform target devices, including PS/2, USB, Sun and serial support.
- **IPv6 Support.** Supports Internet Protocol Version 6.



The AutoView 3050, AutoView 3100 and AutoView 3200 digital KVM appliances provide secure access for one or two digital users and a local analog user in a single location.

Part Number	Description
Ordering Details	
AV3050-001	AutoView 3050 Digital KVM appliance, one digital port with local port, 8 target devices
AV3100-001	AutoView 3100 Digital KVM appliance, one digital port with local port, 16 target devices
AV3200-001	AutoView 3200 Digital KVM appliance, two digital ports with local port, 16 target devices
PS2IAC-7	7' PS/2 CAT 5 integrated access cable
PS2IAC-10	10' PS/2 CAT 5 integrated access cable
PS2IAC-15	15' PS/2 CAT 5 integrated access cable
USBIAC-7	7' USB CAT 5 integrated access cable
USBIAC-10	10' USB CAT 5 integrated access cable
USBIAC-15	15' PS/2 CAT 5 integrated access cable

The AutoView 3050, 3100 and 3200 Digital Appliances let you securely access targeted devices from any location.

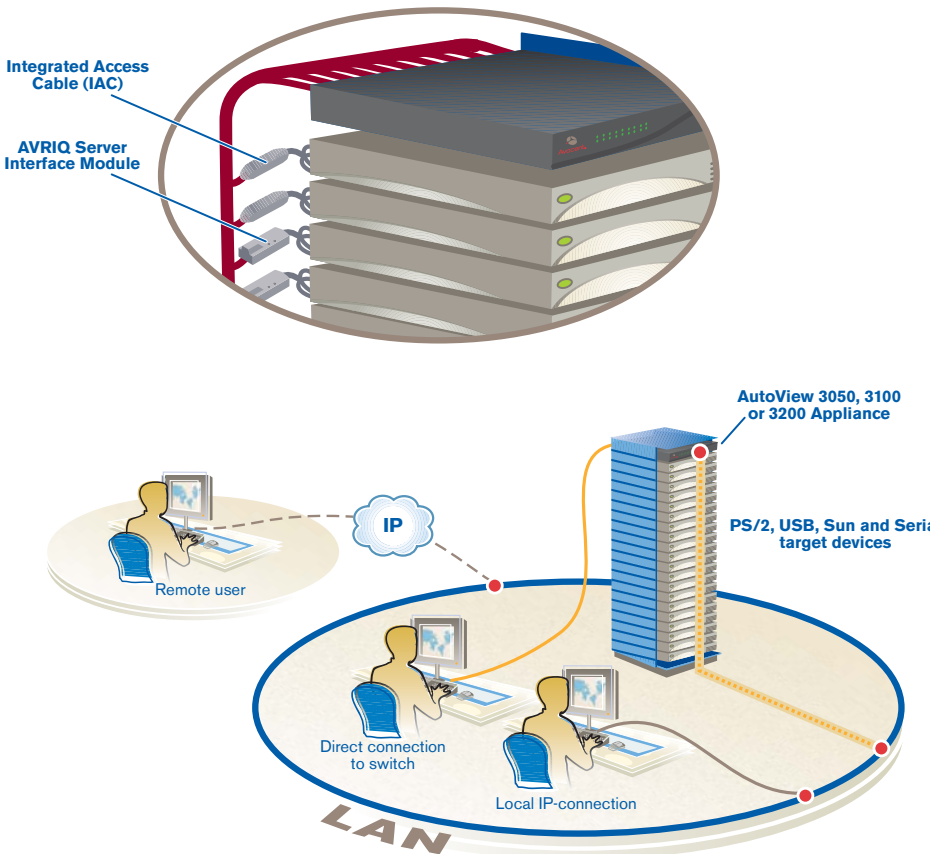

Specifications

Mechanical

Size: 1.72" (4.37 cm)H, 17" (43.18 cm)W, 10.98" (27.98 cm)D

Weight: 7.3 lbs (3.31 Kg)

Style: Rack mount

Environmental

Operating Temperature: 32 to 104 F (0 to 40 C)

Storage Temperature: -4 to 158 F (-20 to 70 C)

Power

Operating Voltage: 100-240 VAC

Power Frequency: 50-60 Hz autosensing

Input: 40 W maximum

Supported Hardware

Computers: PS/2, Sun, USB

Monitors: VGA, SVGA (XGA, XGA-II with adaptor), Maximum Local Port: 1600x1200, Maximum Remote Port using a DSRIQ module: 1280x1024 @ 75 Hz

Peripherals: USB keyboard and mouse, PS/2 keyboard, PS/2 mouse, IntelliMouse

Standards

Approved Agency:

UL, FCC, cUL, ICES-003, CE, GS, VCCI, MIC, C-Tick, GOST

Warranty

Two Year